





FIG. 2a

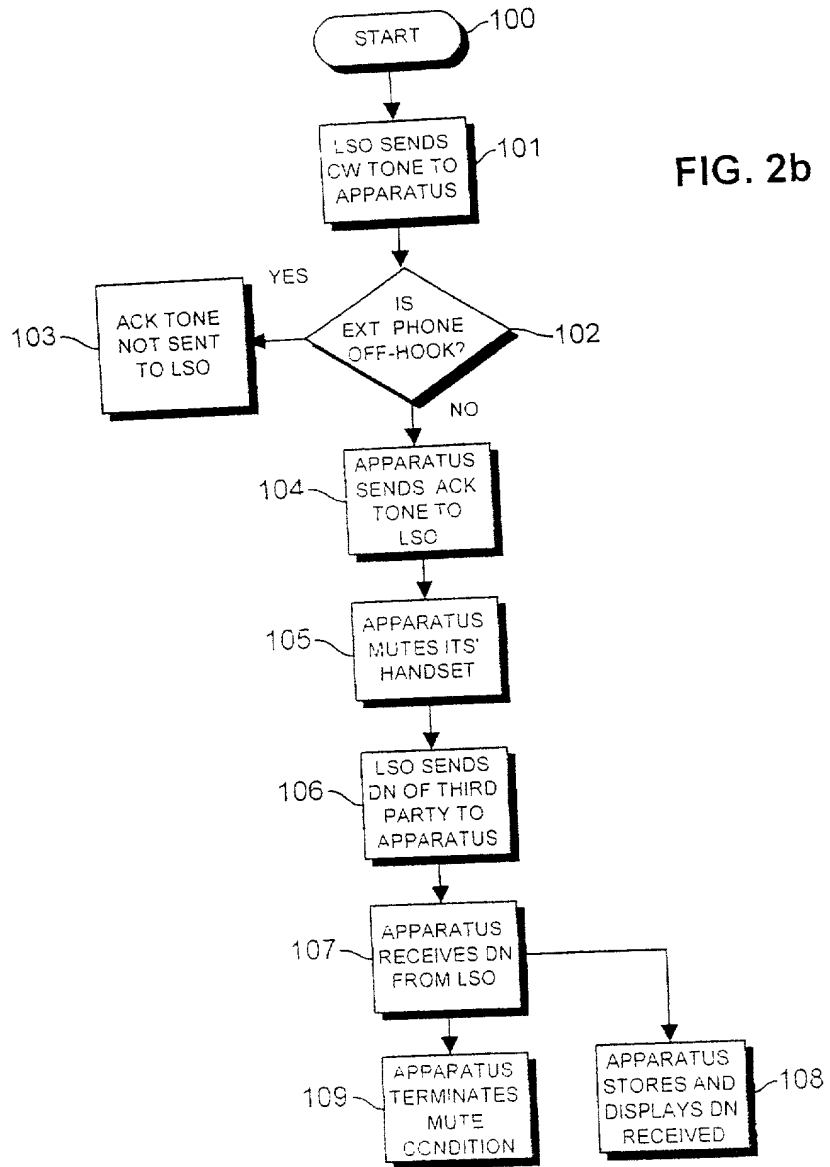


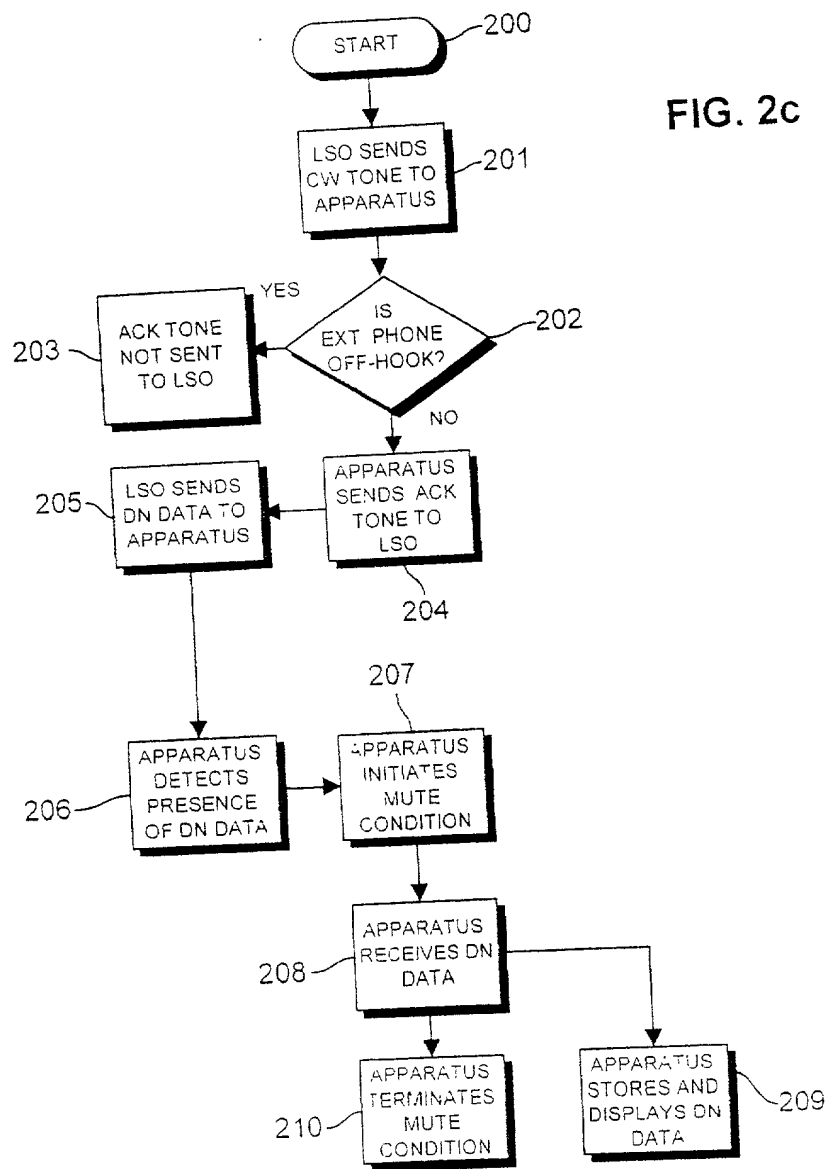

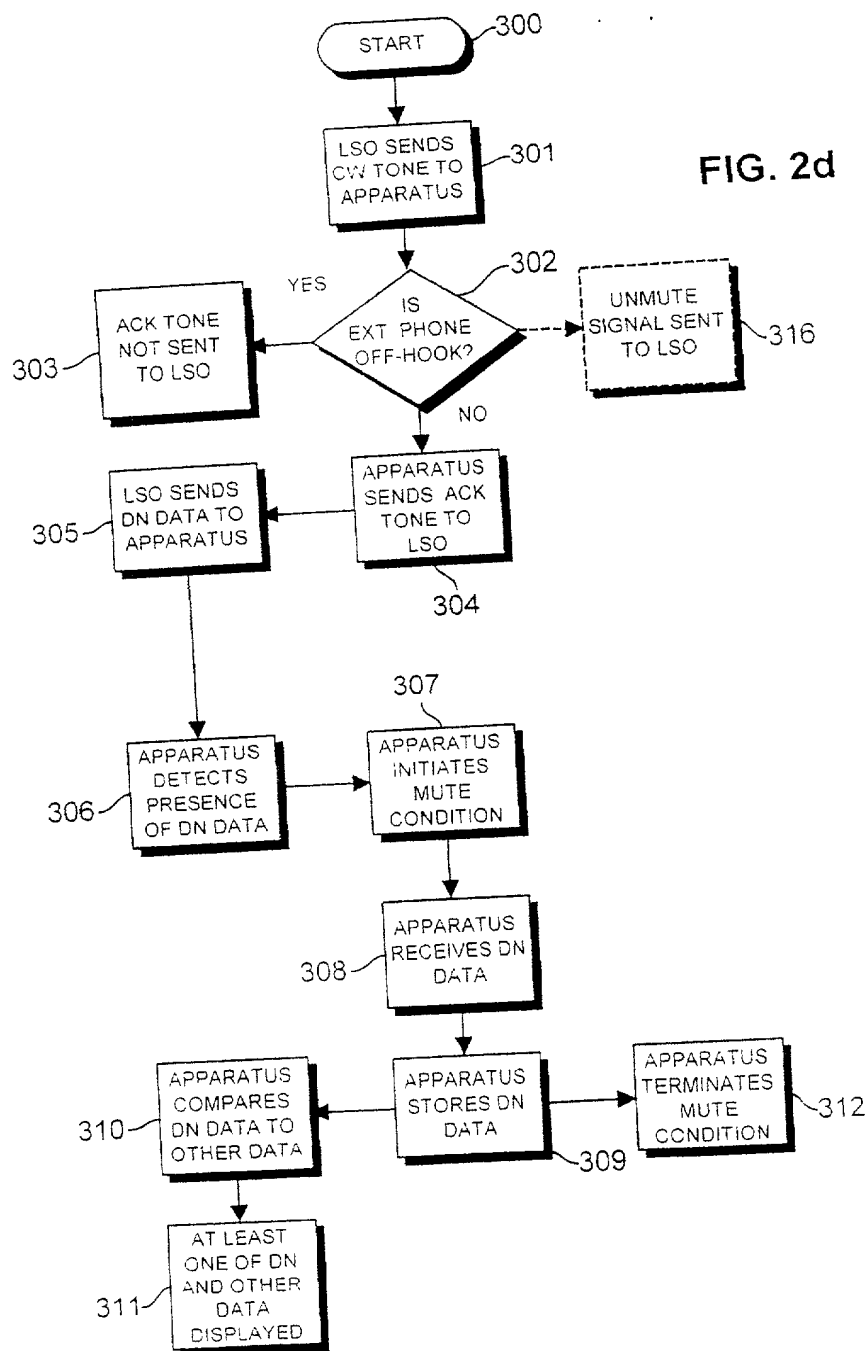

20251014 09:40:01

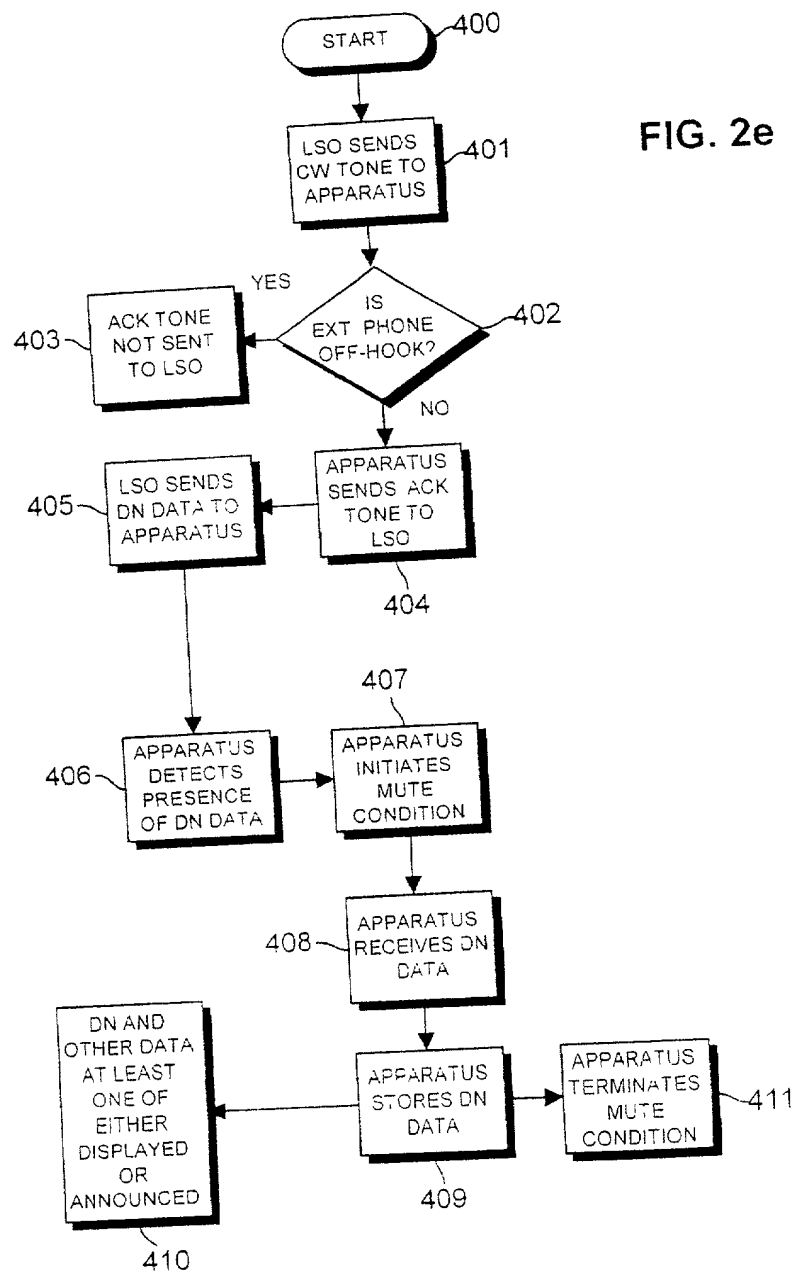

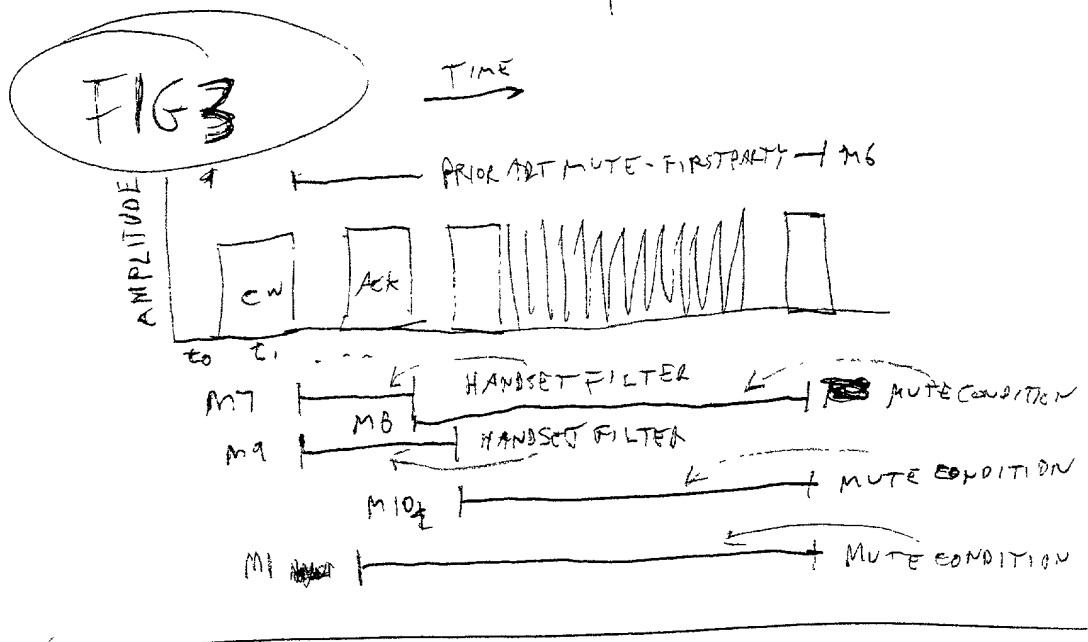

20047677.01502

PRIVILEGED & CONFIDENTIAL PROPERTY
OF DANIEL HENDERSON

FIG 5


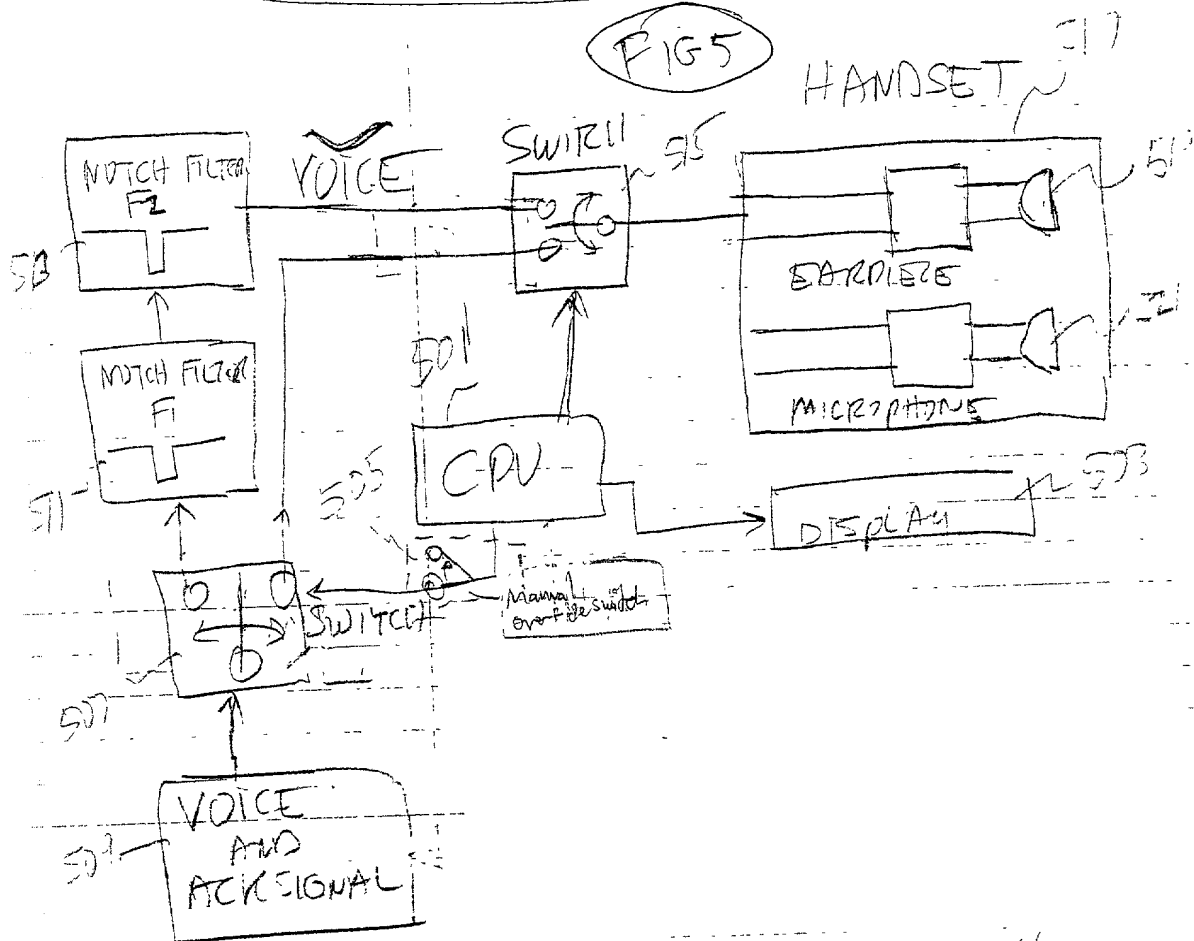


FIG 4

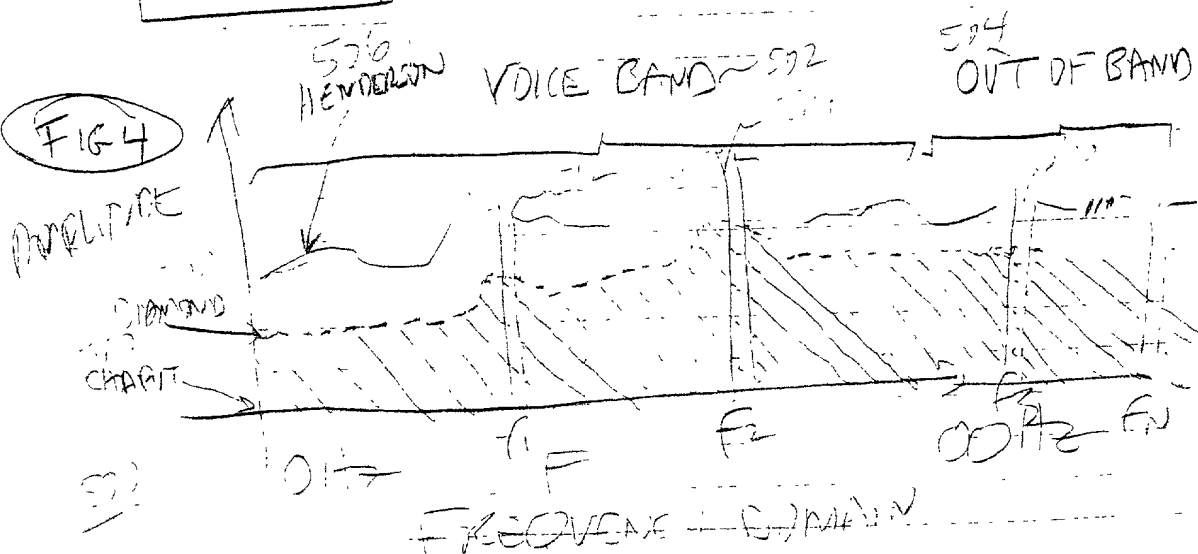

FILTER AND MUTE

FIG. 6

COMMENT:

• Incoming call

• CONVENTIONAL STEP per BELLORE

• PHASE I OF PROCESS:

USE NOTCH FILTERS to eliminate f_1, f_2 DTMF "D" signals ONLY from earpiece or other voice band, high band, out of band - single or multiple

• EXCEPT for voice components at f_1, f_2 conversation continues


• PHASE II OF PROCESS:

Mute or attenuate, or filter to protect and silence CID DATA


• muting can be simultaneous or reversed

• attenuation can replace muting

PER THOMPSON OR DRAHMAN OR CHAPUT

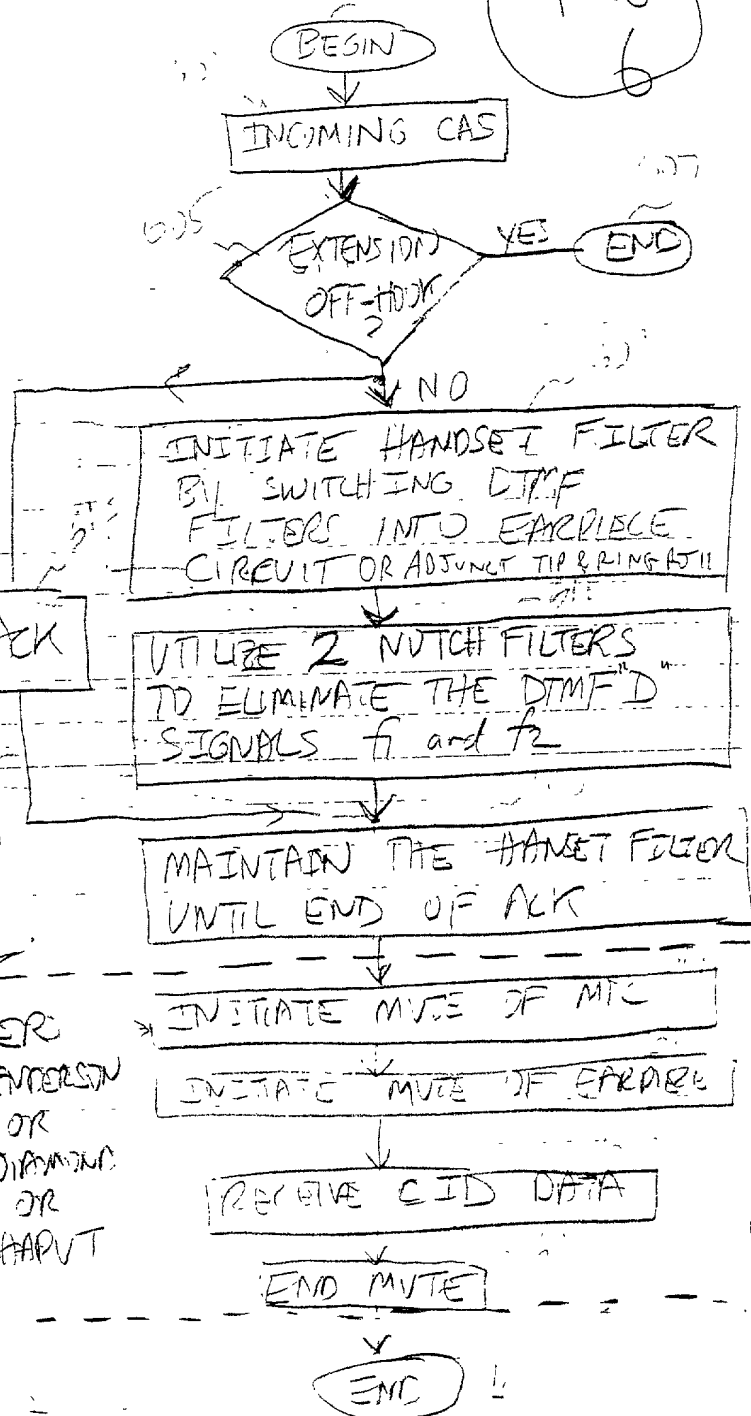


10047677-011502

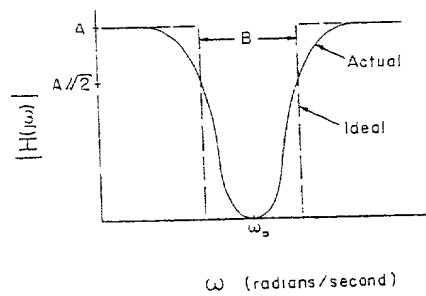

A band-reject amplitude response.

FIGURE 7

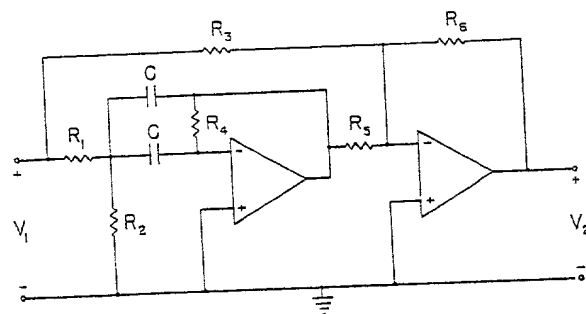

A band-reject filter.

FIGURE 8